



Schur[®]Star 2060-C Bagging System with numerous options

Flexibility and Efficiency

The entire Schur[®]Star product range has been developed with a view to optimising the packing process and the finished package, e.g. by optimum filling conditions, which make the packaging process very user-friendly whilst also ensuring high capacity. Additionally, model 2060-C offers extremely short change-over time and very low waste levels, even when making frequent change over. Possibility for manual - or automatic filling.


Accessories:

- Supporting conveyor
- Opener/closer, recloseable zipper.
- Base opening unit.
- Filling funnels.
- Air extraction system.
- Compression unit.
- Bag vibrating system.
- System for continuous filling of bags.
- Gas flush unit.
- Sealing system for sealing around handle or euroslet.
- Marking equipment - Thermal transfer, Inkjet or labelling.

Technical Specifications

Model	Schur®Star 2060-C, Stainless steel ASSI 304.
Bag Feeding	Continuously with a pre-selected feeding speed. Intermittently with a pre-selected number of bags per cycle. Automatically with a variable stopping time per cycle for manual or automatic filling.
Packaging Speed	Variable bag feeding between 3 and 30 m/min.
Capacity	Max. 80 bags/min., depending on bag size and product.

Bag Change-over	4-5 minutes.
Bag Dimension	Max.: Width 450 mm, length 500 mm. Min.: Width 100 mm, length 100 mm. (Different sizes on request).
Power Supply	3 x 400 VAC + 0 + PE, 50Hz, 3,5 kW.
Air Supply	700 kPa, Consumption: 140 l/min. (ANR).
Control System	Simatic PLC S7-1500
Weight	650 kg.
Bag Material	PE, CPP, coextruded films and laminates Max.: 0,140 mm - Min.: 0,040 mm.

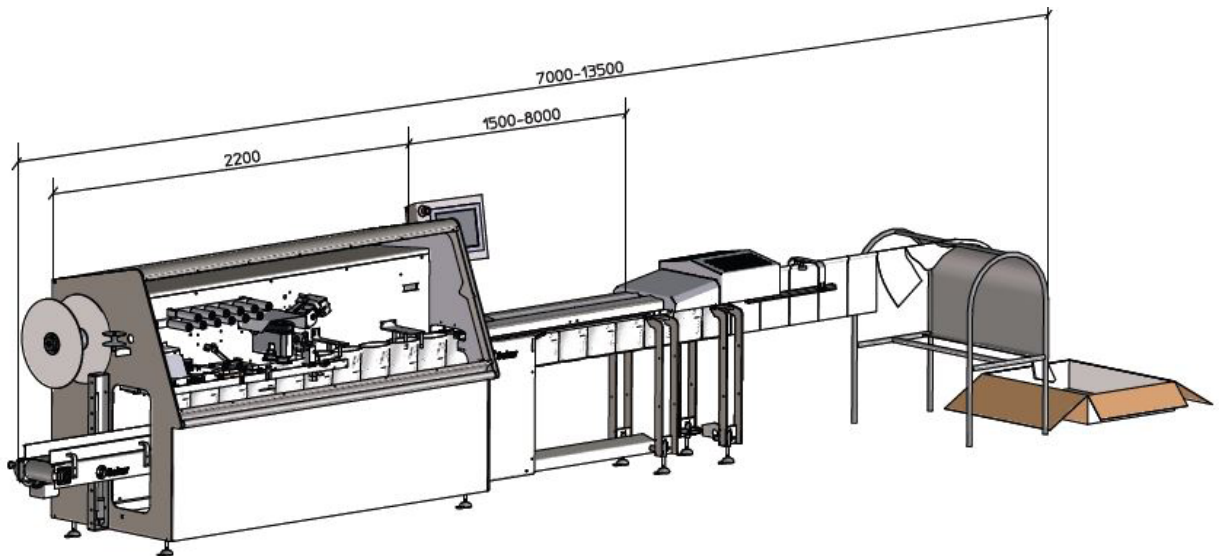

NB: We reserve the right to change technical specifications without notice.

Applications

- Food industry.
- Non-food industry.
- Pharmaceutical industry.
- Chemical industry.
- Small or medium batch productions.
- Medium or high capacity.

