



Schur[®]Star 3025-C Bagging System with numerous options

Flexibility and Efficiency


The entire Schur[®]Star product range has been developed with a view to optimising the packing process and the finished package, e.g. by optimum filling conditions, which make the packaging process very user-friendly whilst also ensuring high capacity. Additionally, model 3025-C offers extremely short change-over time and very low waste levels, even when making frequent change over.

Accessories:

- Supporting conveyor.
- Opener/closer, recloseable zipper.
- Base opening unit (Stand up bags).
- Filling funnels.
- Air extraction system.
- Compression unit.
- Bag vibrating system.
- Gas flush unit.
- Bar Sealing System for laminates.
- Sealing System for sealing around handle or euroslot.
- Marking equipment - Thermal transfer, Inkjet or labelling.

Technical Specifications

Model	Schur®Star 3025-C, Painted version.	Product weight:	Max. 5 kg per bag.
Bag Feeding	Continuously with a pre-selected feeding speed. Intermittently with a pre-selected number of bags per cycle. Automatically with a variable stopping time per cycle for manual or automatic filling.	Bag Change-over	4-5 minutes.
Packaging Speed	Variable bag feeding between 3 and 20 m/min.	Bag Dimension	Max.: Width 300 mm, length 450 mm. Min.: Width 100 mm, length 100 mm. (Different formats on request).
Capacity	Max. 60 bags/min. (Width of bag 200 mm - Continuously filling). Max. 30 bags /min. (Width of bag 200 mm - Intermittently filling - one bag filled at a time).	Power Supply	230 VAC + 1 phase + PE, 50Hz, 2,0 kW.
		Air Supply	600 kPa, Consumption: 0.5 m ³ /hour.
		Control System	Simatic PLC S7-300.
		Weight	500 kg.
		Bag Material	PE, CPP, coextruded films and laminates Max.: 0,100 mm - Min.: 0,040 mm.

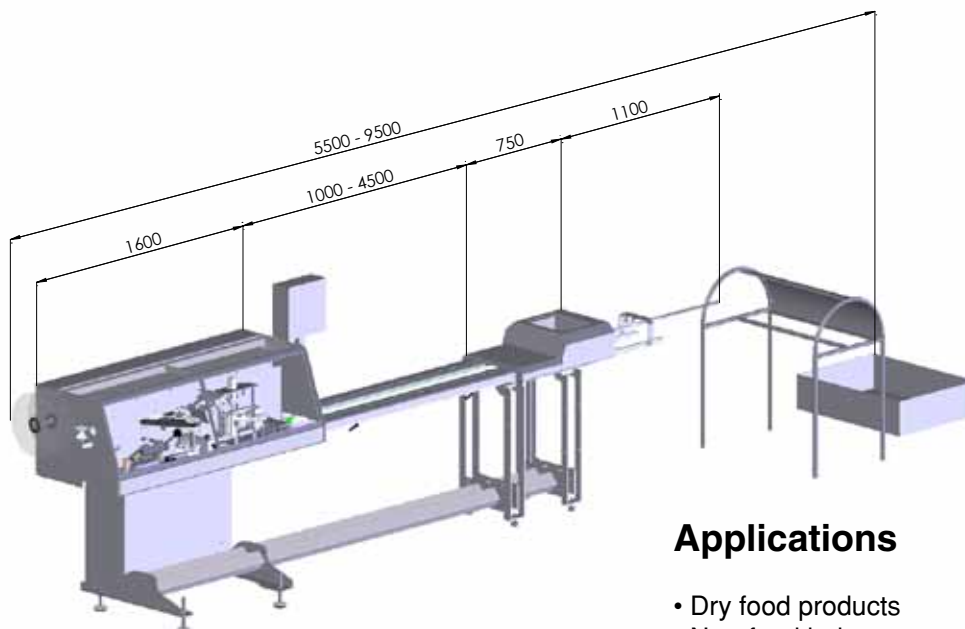

NB: We reserve the right to change technical specifications without notice.

Applications

- Dry food products
- Non-food industry.
- Pharmaceutical industry.
- Chemical industry.
- Small or medium batch productions.
- Medium capacity.

