


FR Waterseal Tape & Corrosion Inhibitor

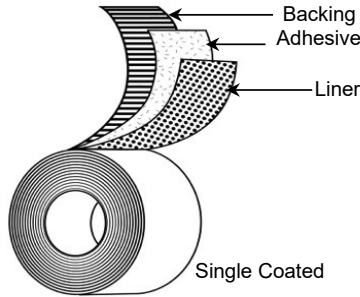

Backing:	Interior-Grade Aromatic Polyurethane
Adhesive:	Urethane-based
Liner:	94# Coated Kraft Paper
Colors:	Transparent
Specifications:	FAR 25.853(a) and Fokker Fk05-193
Size Options:	Incremental sizes 1/4" - 48" x 108Ft

Applications

- Floor joint sealing on aircraft decking in all wet areas including: entryways, galleys, lavatories, and more
- Moisture barrier applications
- Surface protection for high wear areas
- Sound damping

Features

- Polyurethane Film Backing
- Urethane-Based Adhesive
- Kraft Paper Release Liner

Benefits

- Protects and holds under heavy usage
- Tough and durable - abrasion resistant
- Conformable for curves and irregular surfaces
- Transparent to allow for visual inspection
- Strong permanent bond
- Compatible with sealants
- Repositionable
- Can be applied directly over wet sealants
- Smooth clean release - easy to use
- Die cuttable

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	14.0	mils	0.356	mm	PSTC-133
Substrate Thickness	12.0	mils	0.305	mm	PSTC-133
Adhesion to Steel	45	oz/in	4.92	N/cm	ASTM D-3330
Tensile Strength	100	lb/in	175.00	N/cm	ASTM D-3759
Puncture Resistance	40	lbs	18.14	kg	ASTM D-1000
Elongation	600%				
Abrasion/Wear Index	7				ASTM D-4060
Weight	13.05	oz/yd ²	442.47	g/m ²	
Application Temperature	50 °F to 120 °F		10 °C to 49 °C		
Operating Temperature	-65 °F to 300 °F		-54 °C to 149 °C		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
Standard Shelf Life (at 25C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.