




# 5860

## Heavy-Duty Protective Film Tape - Removable

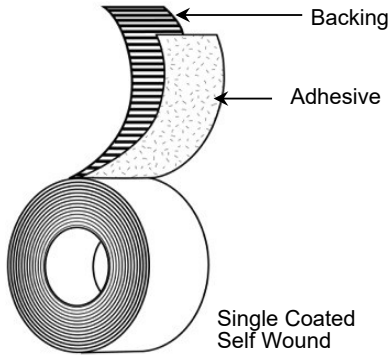

- Backing:** LDPE Film
- Adhesive:** Acrylic (A200)
- Liner:** Self Wound or with 53# Clay Coated Kraft
- Colors:** Clear
- Specifications:** N/A
- Size Options:** Incremental widths 1/4" - 48" x 180ft

### Applications

- Protective masking on plastics and metals during shipping and assembly - saves money by reducing damage to delicate surfaces!
- Surface and label overlaminates

### Features

- LDPE Film
- Acrylic Adhesive

### Benefits

- Thick and tough
- Solvent, chemical, and moisture resistant
- Abrasion resistant
- Moderate tack - bonds to most surfaces
- Removes cleanly from most surfaces
- Easy to apply

### Typical Test Values

	Standard UOM		Metric UOM		Test Method
<b>Total Thickness</b>	8.0	mils	0.203	mm	PSTC-133
<b>Substrate Thickness</b>	7.0	mils	0.178	mm	PSTC-133
<b>Adhesion to Steel</b>	10	oz/in	1.09	N/cm	ASTM D-3330
<b>Tensile Strength</b>	16	lb/in	28.02	N/cm	ASTM D-3759
<b>Elongation</b>	600%				
<b>Application Temperature</b>	50 to 120 °F		10 to 49 °C		
<b>Operating Temperature</b>	-40 to 190 °F		-40 to 88 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F  
 Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.

