


Premium Preservation & Sealing Tape

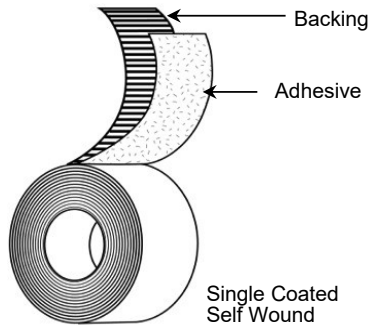

- Backing:** UV Stabilized LDPE Film
- Adhesive:** Urethane (U514)
- Liner:** N/A
- Colors:** White
- Specifications:** N/A
- Size Options:** Incremental widths 1/4" - 48" x 108ft

Applications

- Long-term preservation, sealing, and splicing
- Direct protective mask on aircraft, trucks, boats, or industrial equipment during outdoor storage
- Splicing, seaming, and sealing polyethylene films
- Used in conjunction with outdoor shrink film to secure film and seal film edges during transport or extended outdoor storage

Features

- LDPE Film
- Urethane Adhesive

Benefits

- Excellent chemical and solvent resistance
- Highly conformable
- Stands up to extreme environmental conditions
- Moisture resistant
- Aggressive bond
- Controlled unwind
- Easy to apply even at wide widths
- Will not lift or flag
- Excellent low-temperature adhesion

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	10.5	mils	0.267	mm	PSTC-133
Substrate Thickness	7.5	mils	0.191	mm	PSTC-133
Adhesion to Steel	65	oz/in	7.11	N/cm	ASTM D-3330
Tensile Strength	18	lb/in	31.52	N/cm	ASTM D-3759
Elongation	650%				
Application Temperature	50 to 120 °F		10 to 49 °C		
Operating Temperature	-40 to 200 °F		-40 to 93 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F
 Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.