


# Ludlow Tape® Permanent

## GSO Permanent Transfer Tapes - 54# Liner

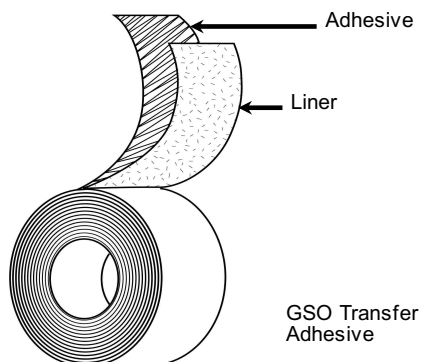

**Adhesive:** Synthetic Rubber (HM800)

**Liner:** 54# SC Kraft with Finger-Lift Edge™ - Bilingual Print

### Product Constructions Available

| Number    | TW   | TL    | AW      |
|-----------|------|-------|---------|
| 7362 (BL) | 3/4" | 3000' | 0.5625" |
| 7363 (BL) | 1"   | 3000' | 0.8125" |
| 7364 (BL) | 3/4" | 6000' | 0.5625" |

### Applications

- Paper to paper attachments
- Signs and posters
- Paper web splicing
- Envelope sealing and direct mail pieces
- Labels and business forms
- Spot and strip tape application

### Features

- Synthetic Rubber Adhesive
- Finger-lift Edge Liner

### Benefits

- High adhesion for a secure permanent bond to plastics, papers and mailers
- Strong initial tack
- Will not bleed through lightweight papers
- Easy to start, easy to use
- Liner removes clean and smooth

### Typical Test Values

|                                      | Standard UOM  | Metric UOM   | Test Method  |
|--------------------------------------|---------------|--------------|--------------|
| <b>Adhesive Thickness (Air Side)</b> | 1.0 mils      | 0.025 mm     | PSTC 133     |
| <b>Liner Thickness</b>               | 3.2 mils      | 0.081 mm     | PSTC 133     |
| <b>Overall Thickness</b>             | 4.2 mils      | 0.107 mm     | PSTC 133     |
| <b>Adhesion to Steel</b>             | 110 oz/in     | 12 N/cm      | PSTC 101 Mod |
| <b>Application Temperature Range</b> | 40 to 105 °F  | 4 to 41 °C   |              |
| <b>Operating Temperature Range</b>   | -20 to 160 °F | -29 to 71 °C |              |

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
 Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.

