
POLYKEN[®] 3616A

Single-Coated Foam Tape

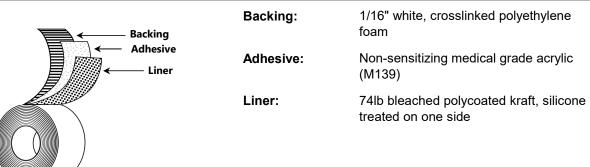

	Applications
TENIO	14

- Electrodes: ECG, EKG, TENS
- AED defibrillator pads

- Medical device mounting
- Transdermal delivery system

Features	Benefits
Polyethylene Foam Backing	 Soft and flexible for maximum patient comfort Conformable and easily adapts to medical devices and body contours
Acrylic Adhesive	 Strong adhesion to surfaces Stable to EtO and gamma sterilization
• 74lb Kraft Liner	Easily die-cut into various shapes and sizesGood dimensional stability and lay flat

Typical Test Values

	Standard	UOM Metric UOM		UOM	Test Method
Total Thickness w/liner	69.8	mils	1.773	mm	PSTC 133
Adhesive Thickness	1.7	mils	0.043	mm	PSTC 133
Carrier Thickness	62.5	mils	1.588	mm	PSTC 133
Liner Thickness	5.6	mils	0.142	mm	PSTC 133
Adhesion to Steel	75	oz/in	8.21	N/cm	PSTC 101 Mod
	Pr	oduc	t Safety	,	

The base adhesives in this medical product have been tested in accordance with ISO 10993 and found to be non-cytotoxic, non-irritating, and non-sensitizing.

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the information and use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.



101 Oakley Street Evansville, IN 47710 1-800-343-7875 Fax 1-800-328-4822 www.berryglobal.com