


# Mecmesin

testing to perfection

## MultiTest-xt

**Tension & Compression Testing System**

Easy-to-use Touch Screen Console

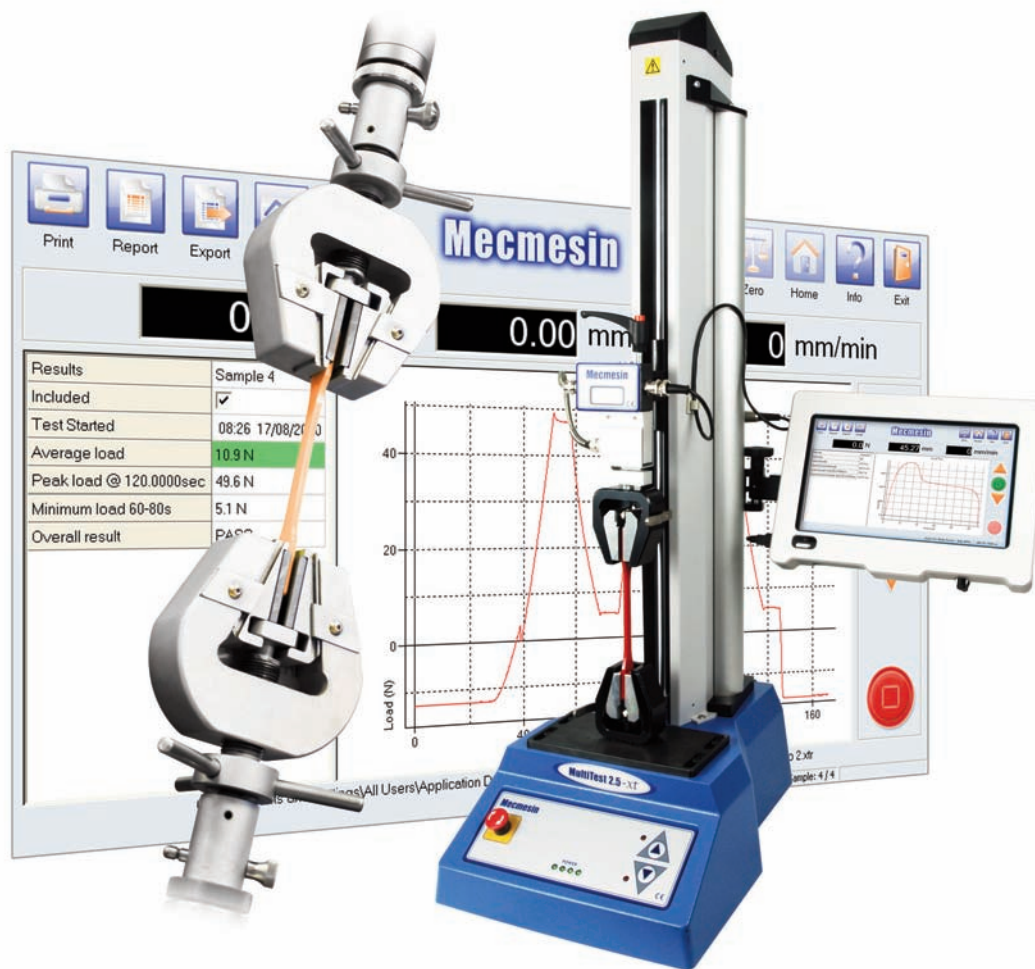

# MultiTest-xt Overview

Quality managers needing an easy-to-use force testing system for the production area should look no further than Mecmesin's range of MultiTest-xt test frames.

With the MultiTest-xt, tension & compression tests are performed at the push of a button, making it ideal for routine quality control of a wide array of products, materials & components.

It is specifically designed for environments where throughput, productivity and minimal training are vital and where the use of a computer is not always suitable.



## Key Features

### Operators




- Password protected log-in - identifies operator for full traceability
- Fast access to 5 favourite tests - customised icons ensure instant test selection
- Unlimited library storage of test methods - minimises set-up time
- Easy-to-use with minimal training - "Simplicity itself" one button launches the test
- Large, easy-to-read touch screen display - clearly shows Test Results and Graph
- Colour-coded indication of "Pass" or "Fail" - immediately alerts the operator
- Test Report - print a comprehensive report of results tailored to your needs

### Administrators



- Easy programming - intuitive menus guide you through creation of test routines
- Customised reports - create your own tailored report
- Choice of 3 program modes:
  - **"Quick Test"** for basic force testing
  - **"Program Test"** for standard test routines
  - **"Advanced Test"** for sophisticated test routines
- Rugged construction - ideal for Production and QC Lab Environments
- Simple touch screen interface - no separate computer required
- 1000Hz data sampling rate - ensures accurate capture of peak loads
- USB output - save test routines and results to a memory stick or network
- Flexible - "plug & play" for easy interchange of loadcells
- Wide range of test stands - capacities from 500N to 50kN

## Easy-to-use Touch Screen Console

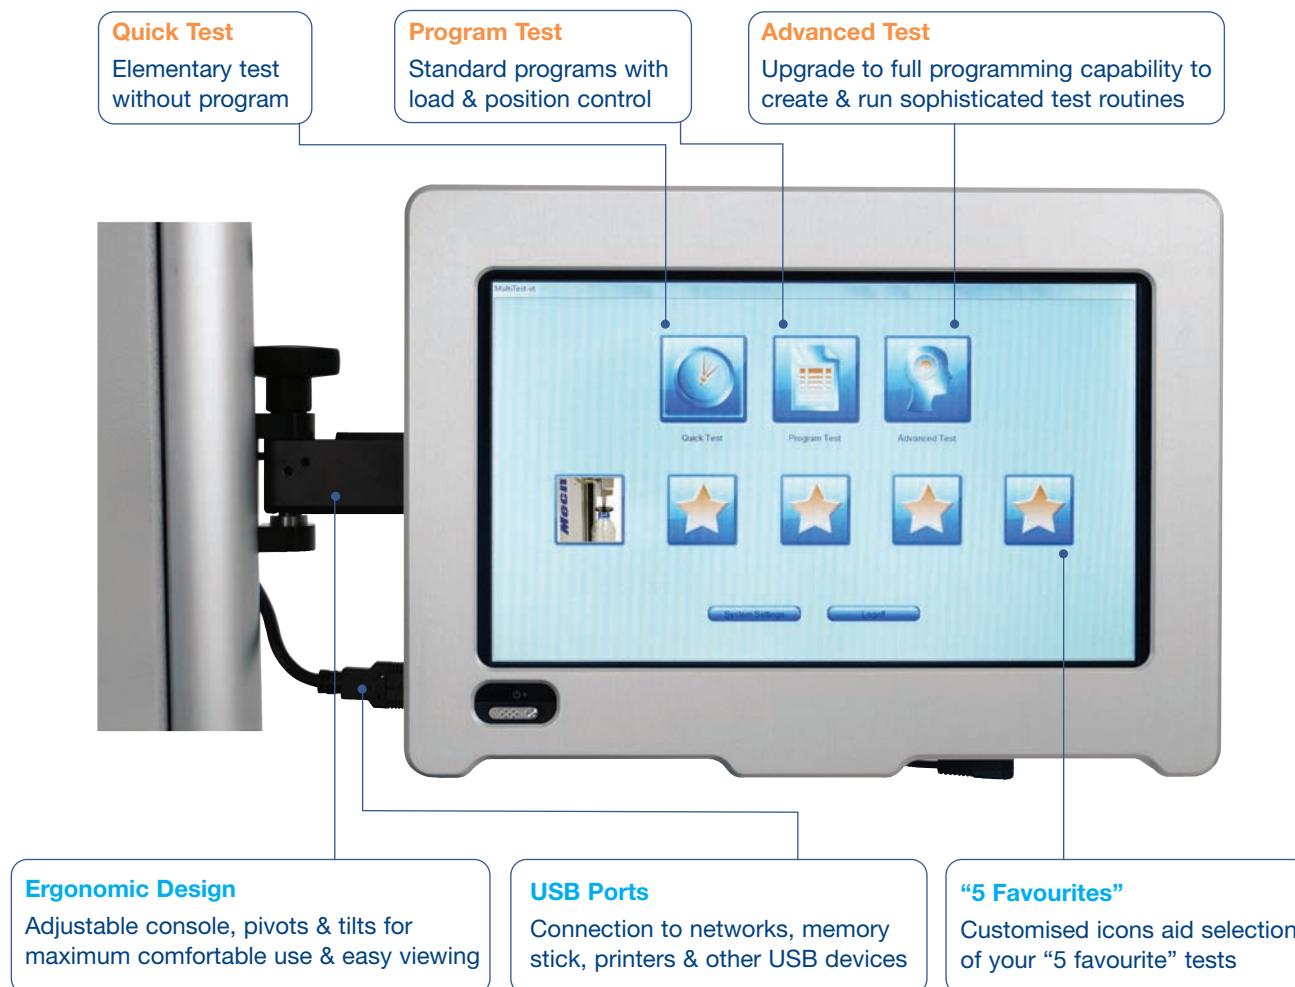

## Secure Access



The MultiTest-xt features multiple levels of password-protected access. "Master" users have full access to all the test set-up and reporting functions. Pre-defined "read-only" tests can be used by "operators" preventing inadvertent changes to the test parameters. Operators can be granted additional access rights (e.g. sample deletion) according to their privileges.

As an extra level of security each test sample and set of results can be tagged with the name of the operator and the date and time of the test. This traceability is designed to assist manufacturers wishing to comply with regulatory requirements for the storage of test results.

easy-to-use  
touch screen operation  
robust, stand-alone system

# Flexible - Choice of 3 Program Modes



## Quick Test

- Save time no need to create a full program
- Run a basic tensile or compression test on one screen
- Ideal for occasional one-off testing

Couldn't be simpler...

### 1. Select Quick Test



2.

**Test Type**  
Select test type

**Speed & Load**  
Define parameters such as speed, load & extension

**Calculations**  
Choose which pre-defined calculations are required by simply ticking a check box

**Quick Test**

**Test**

☒ Tension ☐ Compression

Speed:  mm/min

☒ Run to load ☐ Run to extension

Load:  N

☒ Break detection

Break %:

☒ Pre-test Tare Load

☒ Pre-test Tare Extension

**Calculations**

☒ Load @ break

☒ Extension @ break

☒ Extension @ target load

☐ Load @ target extension

☒ Load @ maximum load

☒ Extension @ maximum load

**Graph Settings**

☒ Load/Displacement ☐ Load/Time

☐ Displacement/Time ☐ Others

Y-Axis:  ▼ X-Axis:  ▼

### 3. Press





## Program Test

- Ideal for hosting established tests
- Create multi-stage test routines to run to load, displacement or break
- Frequently used tests can be assigned to 5 “Favourite” buttons
- Save unlimited number of tests in a library for easy storage and access

### Test Select

**Tests Library**  
Choose from a library of pre-loaded templates to get you started

**Or...**

**Established Tests Library**  
Choose from an unlimited library of your own established tests

### Test Set-up

- Tabs**  
Tab format allows intuitive creation of test routines
- Calculations**  
Use the drop-down box to select & add as many calculations as you need for your test

- Parameters**  
Define the parameters for the calculation & set your Pass/Fail criteria

# Flexible - Choice of 3 Program Modes



## Advanced Test

If your application requires more sophisticated control of the test machine the MultiTest-xt can be upgraded by purchasing the optional Advanced Program Builder Software to enable the Advanced Test functionality.

### QC Lab



Use a separate PC to create multi-stage programs using the Advanced Program Builder Software

transfer

or



### Production Floor



Load and run a program on the MultiTest-xt via the Advanced Test button



With this option you have dedicated access to Emperor™, Mecmesin's powerful premium force testing software. Emperor™ has an open-architecture structure allowing access to a comprehensive library of calculations, which can be tailored to suit your requirements plus a suite of machine-control commands allowing you to create more complex multi-stage programs.

Once created these programs can then be uploaded via a network or memory stick onto the MultiTest-xt and run by simply pressing the Advanced Test button and choosing the program from the list of available tests.

## Live Test Screen

When a test routine has been selected and the test performed, the operator can view the results in 2 selectable formats:

Either...


### Results & Graph

#### Icons

"Touch icons" for quick navigation to printing, reporting & exporting functions

Results for the last sample tested are displayed

Test is displayed graphically as a "live event"

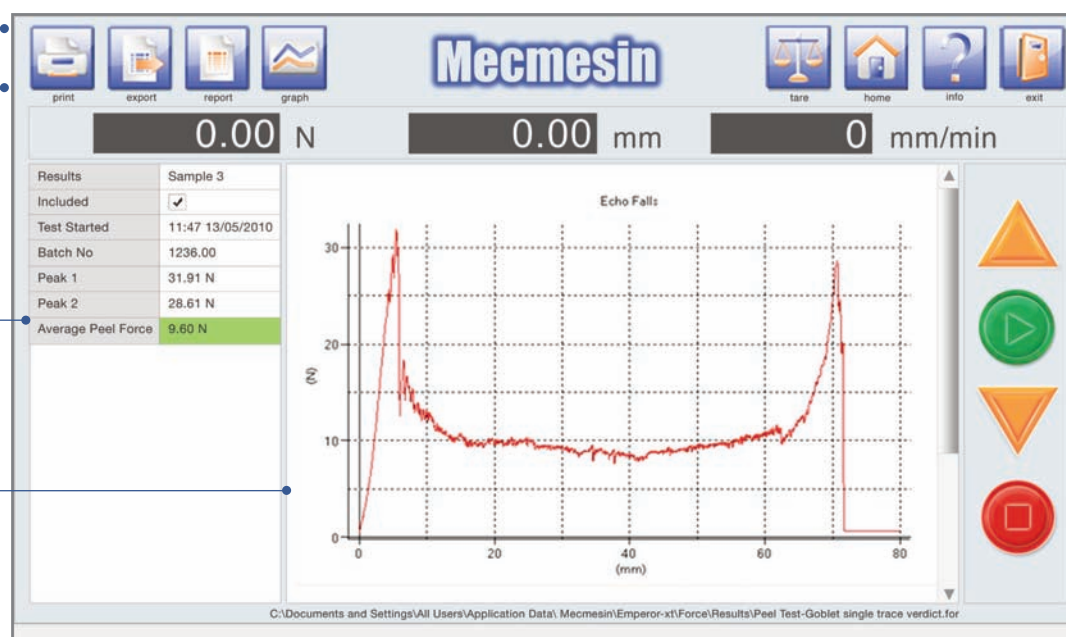

# Live Test Screen


Or...

## Results Only

- Easy-to-read, comprehensive display of test results
- Results for each sample are clearly tabulated
- Colour-coded “Pass” or “Fail” notifications for quick & easy interpretation of results


### Results

Results for all samples tested are displayed

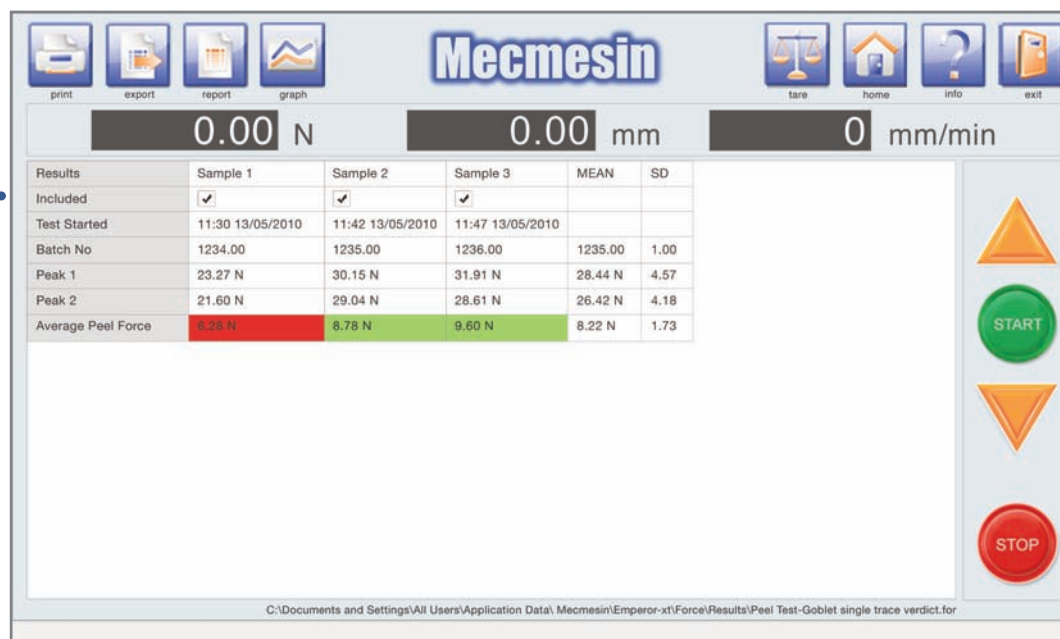

## Reports & Exporting


- Select standard reports or customise your own using built-in templates
- Save test set-up and results via memory stick or network
- Automatic export of data to Microsoft Excel® and SPC packages
- Collect data at 1000 times per second for detailed recording of results from every sample and accurate capture of peak loads

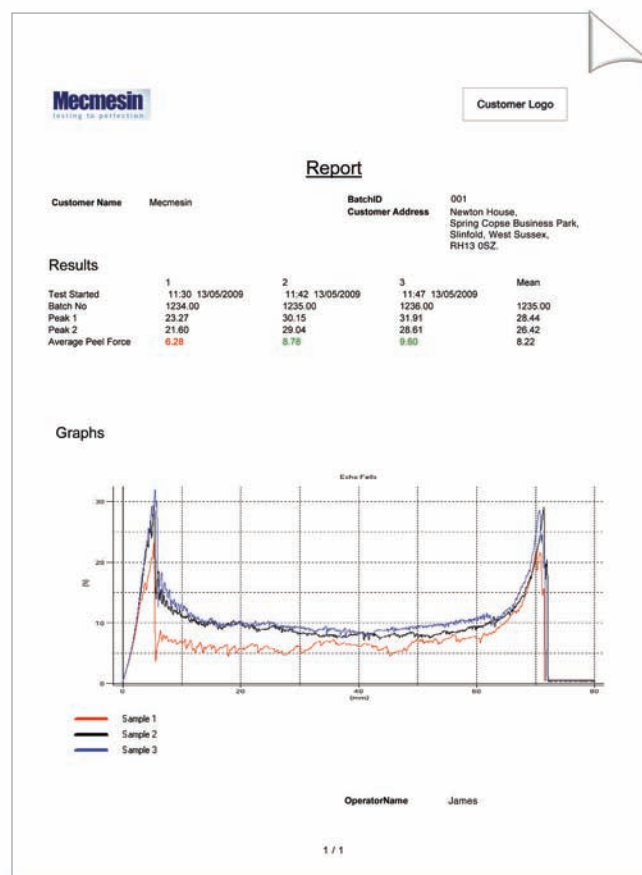

# Expandable to your Changing Needs


## PLC/Digital Control Interface

The MultiTest-xt is fitted with a Digital Control Interface to facilitate communication with external devices such as a PLC (Programmable Logic Controller) or simply a remote footswitch to start the test. The use of a PLC allows you to automate your test routine through loading multiple specimens onto a feeder-carousel thereby increasing productivity and reducing the time spent by an operator on testing.

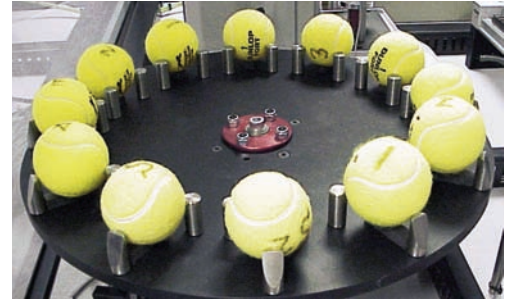

Tennis ball carousel used with a Mecmesin tester

Configure the MultiTest-xt to communicate with a PLC

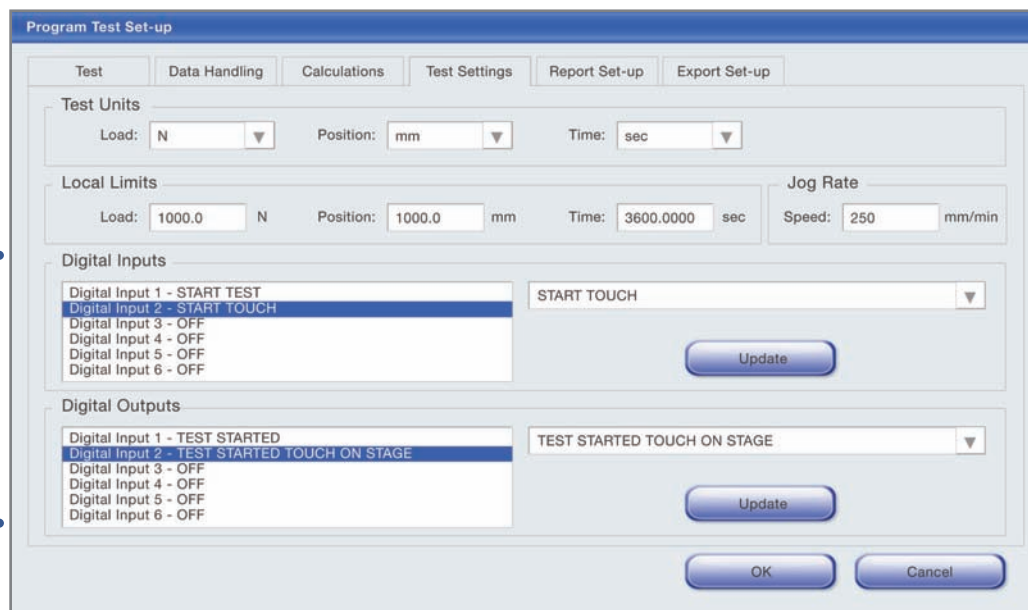

## Wide Range of Capacities from 500N to 50kN

The MultiTest-xt is available in a range of capacities to meet your exact testing requirement. Select from single column machines through to advanced twin-column test frames, which have been specifically designed to test large or high-load samples and products.



MultiTest 2.5-xt



MultiTest 5-xt



MultiTest 10-xt  
MultiTest 25-xt  
MultiTest 50-xt

## “Plug and Play” Loadcells



All Mecmesin loadcells are quickly and easily interchangeable with instant recognition of capacity and calibration data - just “plug-and-play”.

A complete range of fixing adaptors are available to connect any loadcell to Mecmesin’s grips and fixtures.

A MultiTest-xt can be easily and economically enhanced by using a different loadcell. You can select an Intelligent Loadcell (ILC) to cover the working range best suited to your tests.

## Grips & Fixtures

Grips and fixtures are key elements of our force testing systems, designed for holding a vast range of materials and products such as adhesives, composites, glass, plastics, rubber, textiles and wood. Dedicated grips are specially designed to suit components such as crimped terminals, keypads, PCBs, springs and switches.

If you have a specimen, which cannot be held with a standard grip, Mecmesin engineers have many years experience in designing and manufacturing custom-built fixtures and can provide you with a bespoke solution.



Twin-column test frame  
fitted with safety guard

## Safety

Mecmesin’s MultiTest-xt has intrinsic overload protection provided by the software during normal operation.

Furthermore, each MultiTest-xt is fitted with mechanical limit switches that prevent damage to accessories and loadcells plus an emergency stop button on the front panel to halt the movement of the crosshead at any time.

Machine guards are available on request if your application requires additional protection for the operator.

Mecmesin also offer column gaiters, which shield the test frame against ingress from small components, dust etc.

# Specifications

| MultiTest-xt                    |        | 0.5                                                                                                        | 1              | 2.5           | 5              | 10             | 25             | 50             |
|---------------------------------|--------|------------------------------------------------------------------------------------------------------------|----------------|---------------|----------------|----------------|----------------|----------------|
| TEST FRAME                      |        |                                                                                                            |                |               |                |                |                |                |
| Rated capacity                  | N      | 500                                                                                                        | 1000           | 2500          | 5000           | 10000          | 25000          | 50000          |
|                                 | kgf    | 50                                                                                                         | 100            | 250           | 500            | 1000           | 2500           | 5000           |
|                                 | lbf    | 110                                                                                                        | 220            | 550           | 1100           | 2200           | 5500           | 11000          |
| Number of ballscrews            |        | 1                                                                                                          | 1              | 1             | 1              | 2              | 2              | 2              |
| Speed range                     | mm/min | 1 - 1000                                                                                                   | 1 - 1000       | 1 - 1000*     | 1 - 500        | 1 - 1000       | 1 - 1000**     | 1 - 400***     |
|                                 | in/min | 0.04 - 40                                                                                                  | 0.04 - 40      | 0.04 - 40     | 0.04 - 20      | 0.04 - 40      | 0.04 - 40      | 0.04 - 15      |
| Crosshead speed accuracy        |        | ±0.1% of indicated speed                                                                                   |                |               |                |                |                |                |
| Distance between columns        |        | -                                                                                                          | -              | -             | -              | 400mm (15.7")  | 400mm (15.7")  | 420mm (16.5")  |
| Throat depth****                |        | 67mm (2.6")                                                                                                | 67mm (2.6")    | 67mm (2.6")   | 95mm (3.7")    | -              | -              | -              |
| Vertical daylight*****          |        | 1359mm (53.5")                                                                                             | 1159mm (45.6") | 590mm (23.2") | 710mm (28.0")  | 1180mm (46.5") | 1140mm (44.9") | 1330mm (52.4") |
| Height                          |        | 1710mm (67.3")                                                                                             | 1510mm (59.4") | 941mm (37")   | 1082mm (42.6") | 1500mm (59.1") | 1500mm (59.1") | 1931mm (76")   |
| Width (test frame only)         |        | 290mm (11.4")                                                                                              | 290mm (11.4")  | 290mm (11.4") | 328mm (12.9")  | 826mm (32.5")  | 826mm (32.5")  | 864mm (34")    |
| Max width (with console fitted) |        | 546mm (21.5")                                                                                              | 546mm (21.5")  | 546mm (21.5") | 615mm (24.2")  | 1061mm (41.8") | 1061mm (41.8") | 1099mm (43.3") |
| Depth                           |        | 414mm (16.3")                                                                                              | 414mm (16.3")  | 414mm (16.3") | 526mm (20.7")  | 512mm (20.2")  | 542mm (21.3")  | 572mm (22.5")  |
| Weight                          |        | 43kg (95lbs)                                                                                               | 41kg (90lbs)   | 27kg (60lbs)  | 43kg (95lbs)   | 115kg (254lbs) | 145kg (320lbs) | 290kg (639lbs) |
| Maximum power requirement       |        | 120 watts                                                                                                  | 200 watts      | 250 watts     | 150 watts      | 400 watts      | 450 watts      | 450 watts      |
| Voltage                         |        | 230V AC 50Hz or 110V AC 60Hz                                                                               |                |               |                |                |                |                |
| LOAD MEASUREMENT                |        |                                                                                                            |                |               |                |                |                |                |
| Available loadcell ranges       | N      | 2 to 50000 (14 models)                                                                                     |                |               |                |                |                |                |
|                                 | kgf    | 0.2 to 5000 (14 models)                                                                                    |                |               |                |                |                |                |
|                                 | lbf    | 0.45 to 11000 (14 models)                                                                                  |                |               |                |                |                |                |
| Loadcell measurement accuracy   |        | ±0.1% of full scale for loadcells from 2 to 2500N<br>±0.2% of full scale for loadcells from 5000 to 50000N |                |               |                |                |                |                |
| Loadcell measurement resolution |        | 1:6500                                                                                                     |                |               |                |                |                |                |
| DISPLACEMENT                    |        |                                                                                                            |                |               |                |                |                |                |
| Crosshead travel*****           |        | 1200mm (47.3")                                                                                             | 1000mm (39.4") | 500mm (19.7") | 590mm (23.2")  | 960mm (37.8")  | 950mm (37.4")  | 1100mm (43.3") |
| Position control resolution     |        | ±0.01mm (±0.0004")                                                                                         |                |               |                |                |                |                |

\* 2.5kN - recommended maximum speed = 750mm/min (30in/min) above 2000N

\*\* 25kN - recommended maximum speed = 500mm/min (20in/min) above 10000N

\*\*\* 50kN - recommended maximum speed = 250mm/min (10in/min) above 25kN

\*\*\*\* measured on centre line of loadcell

\*\*\*\*\* measured without loadcell or grips

**Note:** See Technical Datasheet 431-390 for dimension drawings

## Common Specifications

|                                                  |                                                 |
|--------------------------------------------------|-------------------------------------------------|
| Operating temperature                            | 10C - 35C (50F - 95F)                           |
| Humidity range                                   | Normal industry and laboratory conditions       |
| Sampling rate (Hz)                               | Selectable from 1000, 500, 100, 50, 10          |
| Compensation for system movement                 | Yes                                             |
| Loadholding                                      | Yes                                             |
| Digital display of Load/Position/Speed           | Yes                                             |
| Output of test results to PC/Printer/Datalogger  | Yes, via USB/Network Ports or Wireless Network  |
| Communication with PLC/Digital Control Interface | RS232 via USB/Network converter in ASCII Format |
|                                                  | Yes, via programmable digital ports             |
|                                                  | 6 Inputs + 6 Outputs                            |

## Options

Column gaiter  
Safety guard

*available upon request*

## Support and Services

- Comprehensive international network of distributors
- 24 month warranty
- Grips & accessories
- Calibration & service centre
- Application support
- On-site installation & training
- Website support

Mecmesin reserves the right to alter equipment specifications without prior notice.

E&OE




# Applications

The flexibility and ease-of-use of the MultiTest-xt make it ideal for applications ranging from testing common springs right through to sophisticated medical devices.

It is ideal for routine testing where a number of different tests are made by different operators. For example, a Quality Manager might set up a simple “Accept” or “Reject” test for use by Goods-in staff. This would be performed with merely a few touches on the console screen and require minimal operator training.


Alternatively, with the Advanced Program Builder, sophisticated multi-stage programs can be created and imported to run on the MultiTest-xt - but the operator still only needs to push a few buttons to perform the test.



Medical device test



Top-load test



Peel test



Tennis ball  
compression test



Crimp terminal  
tensile test



Keypad  
compression test

## Industry sectors



aerospace



automotive



beverage



construction



cosmetics



electrical &  
electronics




engineering



food & drink



medical devices



paper & board



packaging



pharmaceuticals



plastics & rubber



safety



sports



textiles

# Mecmesin

testing to perfection

## Over 30 Years Experience in Force & Torque Technology

Formed in 1977, Mecmesin Limited is today widely regarded as a leader in force and torque technology for quality control testing in design and production. The Mecmesin brand stands for excellent levels of performance and reliability, guaranteeing high quality results. Quality control managers, designers and engineers working on production lines and in research laboratories worldwide rely upon Mecmesin force & torque measurement systems for a range of quality control testing applications, which is almost limitless.

Visit us on the web at:  
**[www.mecmesin.com](http://www.mecmesin.com)**



|                |             |              |
|----------------|-------------|--------------|
| Algeria        | Hong Kong   | Portugal     |
| Argentina      | Hungary     | Romania      |
| Australia      | India       | Russia       |
| Austria        | Indonesia   | Saudi Arabia |
| Bangladesh     | Iran        | Singapore    |
| Belgium        | Ireland     | South Africa |
| Brazil         | Israel      | Slovenia     |
| Canada         | Italy       | Slovakia     |
| Chile          | Japan       | Spain        |
| China          | Korea       | Sri Lanka    |
| Colombia       | Lebanon     | Sweden       |
| Costa Rica     | Malaysia    | Switzerland  |
| Czech Republic | Morocco     | Taiwan       |
| Denmark        | Mexico      | Tunisia      |
| Egypt          | Netherlands | Thailand     |
| Finland        | New Zealand | Turkey       |
| France         | Norway      | USA          |
| Germany        | Philippines | Venezuela    |
| Greece         | Poland      | Vietnam      |

Wherever you are in the world Mecmesin can help you through its global distribution network



Certificate No. FS 58553

DISTRIBUTOR STAMP

### Head Office Mecmesin Limited

Newton House,  
Spring Copse Business Park,  
Slinfold, West Sussex,  
RH13 0SZ, United Kingdom.  
e: [sales@mecmesin.com](mailto:sales@mecmesin.com)  
t: +44 (0) 1403 799979  
f: +44 (0) 1403 799975

### North America Mecmesin Corporation

45921 Maries Road,  
Suite 120, Sterling  
Virginia 20166,  
U.S.A.  
e: [info@mecmesincorp.com](mailto:info@mecmesincorp.com)  
t: +1 703 433 9247  
f: +1 703 444 9860

### Asia Mecmesin Asia Co. Ltd

308 Soi Rohitsuk,  
Ratchadapisek 14 Road,  
Huaykwang, Bangkok, 10310,  
Thailand.  
e: [sales@mecmesinasia.com](mailto:sales@mecmesinasia.com)  
t: +66 2 275 2920 1  
f: +66 2 275 2922

### China Mecmesin (Shanghai) Pte Ltd

Room 302, No. 172,  
Daxue Lu - University Avenue,  
Yangpu District, Shanghai, 200433,  
People's Republic of China.  
e: [sales@mecmesin.cn](mailto:sales@mecmesin.cn)  
t: +86 21 5566 1037 / 3377 1733  
f: +86 21 5566 1036