



www.chinacosmeticpacking.com



www.maypakcn.com

MayPak
美派包装



Worldwide Marketing & Sales

MAYPAK PACKAGING CO.,LTD

Add: No.27 Yuma Rd, Mazhu Doumen,
Yuyao 315453, Zhejiang, China.

Tel: 0086-574-62790606
Cell No.: 0086-18657435151
Fax: 0086-574-62790909
E-mail: sales@maypakcn.com
[Http://www.maypakcn.com](http://www.maypakcn.com)

Manufacturing Facility In Ningbo China

YUYAO S&M PACKAGING CO.,LTD

Add: No.10 Fangye Rd, Yangming Subdistrict,
Yuyao, Ningbo, Zhejiang Province, China

Tel: 0086-574-62795578
Cell No.: 0086-13958350674
Fax: 0086-574-62790909
E-mail: sales@smcospack.com



MAYPAK 2026

使命 / MISSION

让绿色包装陪伴美好生活

Let green packaging give you a better life.

愿景 / VISION

小包装大世界

让美派走进千家万户

Small packaging, big world.

Let Maypak be a part of every family.

价值观 / VALUES

诚信务实 成长突破 感恩奉献 为顾客创造价值

为员工创造机会 为社会创造效益

Honesty and pragmatism, growth and breakthrough,
Thanksgiving and dedication, create value for customers,
create opportunities for employees, create benefits for society.

About Us

关于我们

美派包装是一家集产品设计、研发、生产与销售为一体的现代化企业，深耕行业20余年。我们主营个护日化包装，如塑料喷枪、泵头、真空瓶、膏体管等，以创新设计、高科技设备及一站式服务为核心竞争力。同时，我们积极倡导绿色包装理念，致力于可持续发展，将环保材料融入产品设计与生产中。我们坚持高标准生产，兼具绿色、环保的特性，超越客户的期待，引领行业新风尚。

Maypak Packaging is an enterprise that integrates product design, research and development, production, and sales. With over 20 years of industry experience. Our main business is personal care and daily chemical packaging, such as plastic sprayers, pumps, airless bottles, and deodorant sticks containers. we actively advocate the concept of green packaging, are committed to sustainable development, and integrate environmentally friendly materials into product design and production. We strive to exceed customer expectations and lead the new trend in the industry.

2006

成立于2006年
Was established in 2006

100⁺

专业生产设备100多台
More than 100 sets of professional production equipment

100⁺

专业在职技术人员100多人
Professional in-service technical staff of 100 people

60⁺

产品销往全世界60多个国家
Products are sold to more than 60 countries around the world

Development History

发展历程

• 2006

成立欣蒙生产基地

以方枪、乳液泵、小喷雾、粉泵、塑料盖等为专业产品，打开企业稳步发展新篇章。



Establishment of S&M Packaging Co., Ltd.

The base mainly produces trigger sprayers, lotion pumps, fine mist sprayers, treatment pumps and plastic caps. It opens a new chapter to promote the development of firm.

• 2013

成立上海晶逸玻璃有限公司

为进一步拓展企业规模，强强联手，跨越发展的思路使得企业的品牌不断延伸和充实。



Establishment of Shanghai Jingyi Glass Co., Ltd.

In order to further expand the scale of enterprises, join forces and increase development ideas made the firm's brand continue extending and enriching.

• 2011

成立美派营销中心

实施“质量塑品牌、科技驱发展、服务赢市场”等战略，通过提升形象、技术创新、优化服务，企业稳步成长，为打造一个化妆品包材巨人奠定了基础。



Establishment of MAYPAK Co., Ltd.

Guided by a core focus on quality, technology, and service, the company is steadily advancing to become a leading force in the cosmetic packaging industry.

• 2016

成立彩韵研发中心

人才的吸引、技术的革新，发展为日用品类、护肤类、彩妆类等并举的生产研发大格局。



Establishment of CAIYUN Cosmetic Packaging Co., Ltd.

By attracting talent and pursuing technological innovation, we have developed comprehensive R&D and production capabilities that span daily chemicals, skincare, and color cosmetics.

• 2021

欣蒙生产基地和彩韵研发基地合并

整合优势资源，助力产业发展。



S&M Packaging and CY Center were Merged.

Integrated to promote a better all around Company.

• 2024

成立美派科技园

整合上下游供应链，扩大产品线及产量。



Establishment of the Maypak Innovation Park

Integrating Upstream and Downstream Supply Chains, Expanding Product Lines and Output.

Superior Expressiveness

显著的产品表现力

Silk Screen Printing

丝网印刷



丝网印刷的核心优势在于其墨层厚重、附着力极强、色彩表现鲜艳饱满，且具有出色的耐用性。值得一提的是，我们的所有丝网印刷工序均在自有工厂中完成，确保每一件产品都具备稳定而卓越的品质。

The core strengths of screen printing lie in its thick ink layer, exceptional adhesion, vibrant and saturated colors, as well as outstanding durability. It is also worth emphasizing that all our screen printing processes are carried out in our own factory, ensuring consistent and superior quality in every product.

Water Transferring Printing

水转印



水转印是放在水中无规则的印刷技术，印刷的图案层次丰富，色彩鲜艳，千变万化。最常见的是盖子做仿木纹图案。

Water transfer printing is a process that utilizes water to apply irregular, marbled patterns. It is renowned for producing designs with rich depth, vibrant colors, and infinite variation. A most common application is applying wood grain patterns to lids.

Plating

电镀



电镀利用化学反应在玻璃瓶表面形成一层均匀，致密的金属覆盖物。电镀后的瓶身表面会呈现金属的光泽和质感，使瓶子看起来高档，精致。

Electroplating utilizes chemical reactions to form a uniform and dense metallic coating on the surface of glass bottles. The electroplated bottle exhibits a metallic luster and texture, giving it a premium and sophisticated appearance.

Spray Painting

喷涂



水性油漆均匀的喷在玻璃瓶的表面，除了颜色外通常有透色，实色，光面，哑面，渐变，添加珠光粉等区别。

Water-based paint is evenly sprayed on the surface of glass bottles. Beyond just color, common variations include transparent, opaque, glossy, matte, gradient, and options with pearlescent powder added.

Maypak provides expert guidance on manufacturing processes, product capabilities, and related accessories to help you create distinctive colors, textures, and appearances — ensuring your products stand out in the marketplace. With decades of experience, we optimize your Cost of Goods (COG), enhance Return on Investment (ROI), and support your ongoing product development needs.

Label

贴标



贴标是指将标签或者标识物附着到容器上的过程。成本低，环保性能好。

Labeling refers to the process of affixing labels or identifiers onto containers. It is characterized by low cost and environmentally friendly properties.

Hot Stamping

烫印



通过加热将金色或者银色铝箔纸附在包装表面，具有强金属感。打造产品奢华感。

The process involves applying heated gold or silver foil onto packaging surfaces, creating a bold metallic finish that enhances the product's luxurious appeal.

Packaging Customization Solution

包装定制解决方案

为满足客户的多样化需求，我们提供全面而灵活的定制服务。选择美派公模解决方案，您无需牺牲效率，即可获得低成本的包材方案。通过个性化定制，我们能够将多样化的功能性工艺与艺术设计相结合，赋予标准产品独特的外观与质感，使其完美契合您的品牌调性。如需打造专属包材风格，美派私模服务可为您提供从品牌定位、专项设计到产品生产的一站式深度定制支持。

To meet diverse client needs, we offer full customization services. Meipai's shared molds enable low-cost, efficient packaging solutions. Personalized options blend function and art for unique product appeal. For exclusive packaging, our custom mold service covers everything from branding to manufacturing.

01

Standard
美派公模

We have a wide range of mold types to help you achieve high efficiencies and new product development little to no investment. We have developed thousands of models of bottles, jars, caps, pumps and sprayers including additional accessories. Development of new products has been complicated in the past, causing problems affecting production time, budgets and minimum production quantity. Issues such as these are easily solved easily by using Maypak's current extensive offerings.

02

Customized
个性化定制

From simple low-cost products to decorative sophisticated high-end products, Maypak does it all and will manage the process from start to finish.

03

Custom
美派私模

Our mission is to execute the customer's idea of appearance, function and quality. Utilizing a combined 20 years of operations experience you already are ahead of the game.

Contents

目录

余姚市美派包装有限公司

Yuyao Maypak Packaging Co., Ltd.

2026

08-17

手扣式喷雾器
Trigger Sprayers



18-38

乳液瓶 / 泡沫泵
Lotion Pumps / Foam Pumps



39-43

小喷雾
Fine Mist Sprayers



44-47

迷你喷雾器
Mini Sprayers



48-51

粉泵
Treatment Pumps



52-57

盖子
Caps



SM13E

Trigger Sprayers
手扣式喷雾器

HIGH-GRADE SPRAY BOTTLE

- **High-Quality Safety Material:** Made of premium PP material, non-toxic and eco-friendly, ensuring safe and worry-free use.
- **Excellent Atomization Effect:** Provides a fine and even spray, highly durable with over 10,000 rated actuations.
- **Leak-Proof and Child-Safe Switch:** Prevents accidental presses and leaks.
- **Effort-Saving Handle Design:** Ergonomically designed handle ensures comfortable and easy repeated operation.
- **Wide Range of Applications:** Ideal for various uses at home, in the garden, or in the office.



Discharge Rate:
0.26-0.30 ml/T

Closure:
24/410
28/410

Qty:
500 pcs

Meas:
57x33x39 cm

SM13E

Trigger Sprayers

Outside Spring

Corrosion-resistant, Durable, Easy-clean, Reliable.



SM13E02

Discharge Rate: 0.26-0.30ml/T
Ø24/410, Ø28/410



SM13E03

Discharge Rate: 0.90-1.10ml/T
Ø24/410, Ø28/410



SM13E04-1

Discharge Rate: 0.40ml/T
Ø24/410, Ø28/410



SM13E04-2

Discharge Rate: 0.40ml/T
Ø24/410, Ø28/410



SM13E05-1

Discharge Rate: 0.40ml/T
Ø24/410, Ø28/410



SM13E05-2

Discharge Rate: 0.40ml/T
Ø24/410, Ø28/410

SM12B

Trigger Sprayers
手扣式喷雾器

PATENT NO.ZL 2012 3 0440001.X

- **Unique Locking Device:** One-Push Lock & Release.
- **Multi-Scenario Application:** Room fresheners, Perfumes, Personal care, Hair sprays.



Discharge Rate:
0.50-0.55 ml/T

Closure:



Qty:
500 PCS/CTN

Meas:
57x32x39 cm



SM11-SM13

Trigger Sprayers



SM1104
Discharge Rate: 0.30ml/T
ø20/410, ø24/410, ø28/410



SM1105B
Discharge Rate: 0.30ml/T
ø20/410, ø24/410, ø28/410



SM13A02
Discharge Rate: 0.15ml/T
ø24/410



SM13C02-B
Discharge Rate: 0.30ml/T
ø20/410, ø24/410, ø28/410



SM13B
Discharge Rate: 0.25-0.30ml/T
ø20/410, ø24/410, ø28/410



SM13F
Discharge Rate: 0.30ml/T
ø20/410, ø24/410, ø28/410
QTY: 450-500 PCS/CTN
Meas: 43x32x38 cm

SM11-SM13

All Plastic MINI Trigger Sprayers

All Plastic

Fully Recyclable



SM1107

Discharge Rate: 0.26-0.3cc
 Ø20/410, Ø24/410
 Ø24/415, Ø28/410



SM1108

Discharge Rate: 0.26-0.3cc
 Ø20/410, Ø24/410
 Ø24/415, Ø28/410

SM14

Trigger Sprayers



SM1410A

Discharge Rate: 1.20-1.40ml/T
 QTY: 400 PCS/CTN
 Meas: 50x38x38 cm



SM1410B

Discharge Rate: 1.20-1.40ml/T
 QTY: 400 PCS/CTN
 Meas: 50x38x38 cm



SM1410C

Discharge Rate: 1.20-1.40ml/T
 QTY: 400 PCS/CTN
 Meas: 50x38x38 cm



SM12C

Discharge Rate: 0.55-0.6cc
 Ø24/410, Ø28/410
 Smooth / Ribbed



SM13C02-C

Discharge Rate: 0.26-0.3cc
 Ø20/410, Ø24/410
 Ø24/415, Ø28/410



SM13B03


Discharge Rate: 0.26-0.3cc
 Ø20/410, Ø24/410
 Ø24/415, Ø28/410



SM13F-2


Discharge Rate: 0.26-0.3cc
 Ø20/410, Ø24/410
 Ø24/415, Ø28/410
 Smooth / Ribbed

NOZZLE OPTIONS

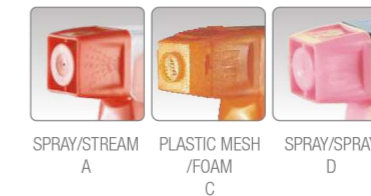

SPRAY/STREAM A
 PLASTIC MESH /FOAM C
 SPRAY/SPRAY D

CLOSURE OPTIONS



RATCHET
 Ø28/400, Ø28/410



SM1402

Discharge Rate: 1.20-1.40ml/T
 QTY: 400 PCS/CTN
 Meas: 53x38x44 cm



SM1411

Discharge Rate: 1.20-1.40ml/T
 QTY: 400 PCS/CTN
 Meas: 53x38x44 cm



SM1413


Discharge Rate: 1.20-1.40ml/T
 QTY: 500 PCS/CTN
 Meas: 53x38x44 cm

NOZZLE OPTIONS



FOAM A
 ON-OFF

CLOSURE OPTIONS



Ø28/400, Ø28/410
 RATCHET

SM14


Trigger Sprayers



SM1412

Discharge Rate: 1.50ml/T
QTY: 300 PCS/CTN
Meas: 59x40x31 cm

NOZZLE OPTIONS

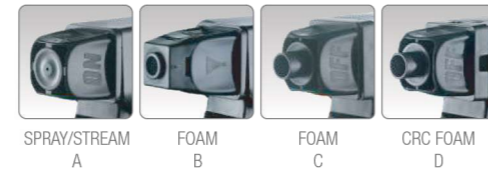

CLOSURE OPTIONS



∅28/400, ∅28/410
RATCHET



SM1416

Discharge Rate: 0.90ml/T
QTY: 400-450 PCS/CTN
Meas: 50x35x40 cm



SM1417

Discharge Rate: 0.90ml/T
QTY: 400-450 PCS/CTN
Meas: 50x35x40 cm



SM1418

Discharge Rate: 0.90ml/T
QTY: 400-450 PCS/CTN
Meas: 50x35x40 cm

NOZZLE OPTIONS



SPRAY/STREAM A ON/OFF B FOAM C FOAM/SPRAY D

CLOSURE OPTIONS



∅28/400, ∅28/410 RATCHET INVERTED

SM14



SM1426

Discharge Rate: 0.80-0.90ml/T
∅28/410
QTY: 500 PCS/CTN
Meas: 54x38x44 cm



SM1427

Discharge Rate: 0.80-0.90ml/T
∅28/410
QTY: 500 PCS/CTN
Meas: 54x38x44 cm



SM1428

Discharge Rate: 0.80-0.90ml/T
∅28/410
QTY: 500 PCS/CTN
Meas: 54x38x44 cm



SM1423

Discharge Rate: 0.90ml/T
∅28/410, ∅28/415, RATCHET
QTY: 350 PCS/CTN
Meas: 57x33x39 cm



SM1403

Discharge Rate: 0.90-1.0ml/T
∅28/400, ∅28/410
Function: SPRAY-STREAM-OFF
QTY: 625 PCS/CTN
Meas: 60x38x40 cm



SM1404

Discharge Rate: 3.5±0.15ml/T
∅28/400, ∅28/410, ∅28/415
Function: SPRAY-STREAM-OFF
QTY: 300 PCS/CTN
Meas: 45x39x57 cm



SM1408

Discharge Rate: 1.1±0.1ml/T
∅28/400, ∅28/410, ∅28/415
Function: SPRAY-STREAM-OFF
QTY: 400 PCS/CTN
Meas: 45x39x57 cm



SM1414

Discharge Rate: 0.9±0.1ml/T
∅28/400, ∅28/410, ∅28/415
Function: SPRAY-STREAM-OFF
QTY: 450 PCS/CTN
Meas: 45x39x57 cm



SM1501

Discharge Rate: 3.0-3.5ml/T
∅28/400
QTY: 100 PCS/CTN
Meas: 47x38x24 cm

SM16

Trigger Sprayers



SM1601

Discharge Rate: 0.75-0.80ml/T



SM1603

Discharge Rate: 0.75-0.80ml/T



SM1604

Discharge Rate: 0.75-0.80ml/T



SM1605

Discharge Rate: 0.75-0.80ml/T



SM1606

Discharge Rate: 0.75-0.80ml/T



SM1607

Discharge Rate: 0.75-0.80ml/T



SM1609

Discharge Rate: 0.75-0.80ml/T



SM1610

Discharge Rate: 0.75-0.80ml/T



SM1611

Discharge Rate: 0.75-0.80ml/T



SM1612

Discharge Rate: 0.75-0.80ml/T



SM1613

Discharge Rate: 0.75-0.80ml/T



SM1614


Discharge Rate: 0.75-0.80ml/T

NOZZLE OPTIONS



SPRAY/STREAM A SPRAY/STREAM B SPRAY/SPRAY C FOAM/SPRAY E FOAM F FOAM/SPRAY G FOAM/SPRAY H SPRAY/STREAM I

CLOSURE OPTIONS



28/400 28/410 28/415 RATCHET

TRIGGER OPTIONS



A B C E

SM18

Trigger Sprayers - Plastic Spring 手扣式喷雾器 - 塑料弹簧

ALL PLASTIC ENVIRONMENTAL PROTECTION

- **Eco-Sustainability:** Made with 100% recyclable mono-plastic design.
- **Superior User Experience:** Unique plastic spring trigger ensures a soft, comfortable, and easy pull.
- **Strong Compatibility & Versatility:** Multiple screw type options to fit various bottle openings.



SM1801



SM1802



SM1803

Discharge Rate:

1.20-1.40 ml/T

Nozzle:



SPRAY/STREAM A PLASTIC MESH/FOAM C SPRAY/SPRAY D

Closure:



28/400
28/410
Ratchet

Qty:

400 PCS/CTN

Meas:

54x38x38 cm

All Plastic

SM18

Trigger Sprayers




SM1804

Discharge Rate: 1.40ml/T
 QTY: 500 PCS/CTN
 Meas: 60x38x44 cm


NOZZLE OPTIONS



TRIGGER OPTIONS



CLOSURE OPTIONS



SM1805

Discharge Rate: 1.20-1.40ml/T
 QTY: 400 PCS/CTN
 Meas: 55x45x38 cm



SM1806

Discharge Rate: 1.20-1.40ml/T
 QTY: 400 PCS/CTN
 Meas: 55x45x38 cm

NOZZLE OPTIONS



CLOSURE OPTIONS



SM1811

Discharge Rate: 1.20ml/T
 Closure: Ø28/400, Ø28/410
 QTY: 500 PCS/CTN
 Meas: 60x39x45 cm

NOZZLE OPTIONS



SM1810


Discharge Rate: 1.00±0.05ml/T
 Closure: Ø28/410
 QTY: 400 PCS/CTN
 Meas: 54x38x38 cm

SM2801

All Plastic Lotion Pumps - Plastic Spring
 全塑乳液泵 - 塑料弹簧

ALL PLASTIC ENVIRONMENTAL PROTECTION

- **Environmental Sustainability:** All-plastic design makes the product 100% recyclable and environmentally friendly.
- **Safety & Reliability:** Special structural design principle makes the pump safer and more reliable for wider applications.

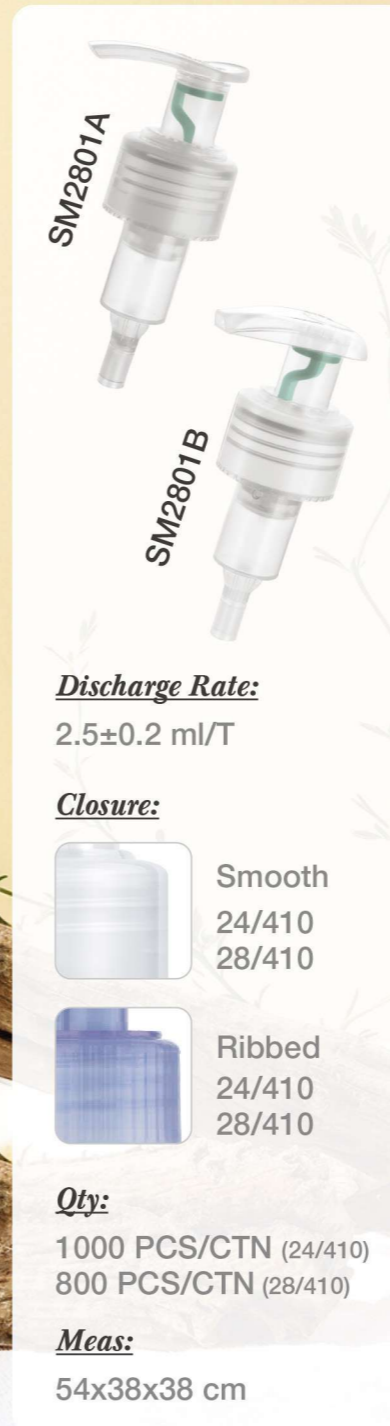

Discharge Rate:
 2.5±0.2 ml/T

Closure:
 Smooth
 24/410
 28/410

Ribbed
 24/410
 28/410

Qty:
 1000 PCS/CTN (24/410)
 800 PCS/CTN (28/410)

Meas:
 54x38x38 cm



Twist Lock

SM21

- Various styles of dispensing heads.
- Designed for comfortable and easy use.



Discharge Rate:
1.20-1.50ml/T
Smooth / Ribbed / Aluminum

TWIST LOCK

Various styles of heads options



Various closure size options



Various aluminum shell options



SM22

- With the spring outside to eliminate contact of metal to product

Discharge Rate:
2.00-2.20ml/T
Smooth / Ribbed / Aluminum



TWIST LOCK

Various styles of heads options



Various closure size options



Various aluminum shell options



SM23

- Smooth and ribbed closures in all standard sizes as well as with aluminum shells over the closure.
- Many nozzle designs for easy of use.



Discharge Rate:
1.80-2.00ml/T
Smooth / Ribbed / Aluminum

SCREW DOWN

Various styles of heads options



Various closure size options



Various aluminum shell options



SM24

- Usage: Hair Care & Hair gel / Bath & Body Wash / Kitchen detergent soap



Discharge Rate:
2.00-2.20ml/T
Smooth / Ribbed / Aluminum

SCREW DOWN

NEW OPTIONS



ABS Closure

Various styles of heads options



Various closure size options



Various aluminum shell options



SM25A

Lotion Pumps



Ø33/410, Ø38/410
SM25A1
Discharge rate:
4.00±0.40ml/T



Ø33/410, Ø38/410
SM25A4
Discharge rate:
4.00±0.40ml/T



Ø33/410, Ø38/410
SM25A5
Discharge rate:
4.00±0.40ml/T



Ø33/410, Ø38/410
SM25A6
Discharge rate:
4.00±0.40ml/T

SM25A



Ø33/410, Ø38/410
SM25A18
Discharge rate:
4.00±0.40ml/T



Ø33/410, Ø38/410
SM25A19
Discharge rate:
4.00±0.40ml/T



Ø38/410
SM25A21-2
Discharge rate:
10cc, 20cc, 25cc, 30cc

Outside Spring



Ø33/410, Ø38/410
SM25A8
Discharge rate:
4.00±0.40ml/T



Ø33/410, Ø38/410
SM25A12
Discharge rate:
4.00±0.40ml/T



Ø33/410, Ø38/410
SM25A10
Discharge rate:
4.00±0.40ml/T



Ø33/410, Ø38/410
SM25A11
Discharge rate:
4.00±0.40ml/T



Ø24/410, Ø28/410
SM25F01
Discharge rate: 2.5cc



Ø24/410, Ø28/410
SM25F02
Discharge rate: 2.5cc



Ø24/410, Ø28/410
SM25F03
Discharge rate: 2.5cc



Ø24/410, Ø28/410
SM25F04
Discharge rate: 2.5cc



Ø33/410, Ø38/410
SM25A14
Discharge rate:
4.00±0.40ml/T



Ø33/410
SM25A15
Discharge rate:
4.00±0.40ml/T



Ø33/410, Ø38/410
SM25A16
Discharge rate:
4.00±0.40ml/T



Ø33/410, Ø38/410
SM25A17
Discharge rate:
4.00±0.40ml/T



Ø24/410, Ø28/410
SM25F05
Discharge rate: 2.5cc



Ø24/410, Ø28/410
SM25F06
Discharge rate: 2.5cc



Ø28mm, Ø33mm
SM25F07
Discharge rate: 4.5cc



Ø28mm, Ø33mm
SM25F08
Discharge rate: 4.5cc

SM25A-SM26



Ø28mm, Ø33mm
SM25A09
Discharge rate: 4.5cc



Ø28mm
SM25F10
Discharge rate: 4.5cc



Ø28mm, Ø33mm
SM25A11
Discharge rate: 4.5cc



Ø28mm, Ø33mm
SM25F12
Discharge rate: 4.5cc



Ø28/410
SM25C
Discharge rate: 4.00ml/T



Ø28/410
SM25C
Discharge rate: 4.00ml/T



Ø28/415
SM25C
Discharge rate: 4.00ml/T



Ø28/415
SM25C
Discharge rate: 4.00ml/T

High Output



Ø24/410
SM2601
Discharge rate:
0.80-1.00ml/T



Ø24/415
SM2602
Discharge rate:
0.80-1.00ml/T



Ø28/400
SM2603
Discharge rate:
0.80-1.00ml/T




Ø28/410
SM2604
Discharge rate:
0.80-1.00ml/T

SM25E Bathroom Soap Pumps 卫浴乳液泵

SM25E01 ABS

Finish: GOLD, Chrome, Nickel, Matte, Black Nickel, Ceramic white, Antique Brass, UV Purple
UV Matte, Natural, UV Nickel, Oil Rubbed Bronze, Champagne, Brushed Nickel

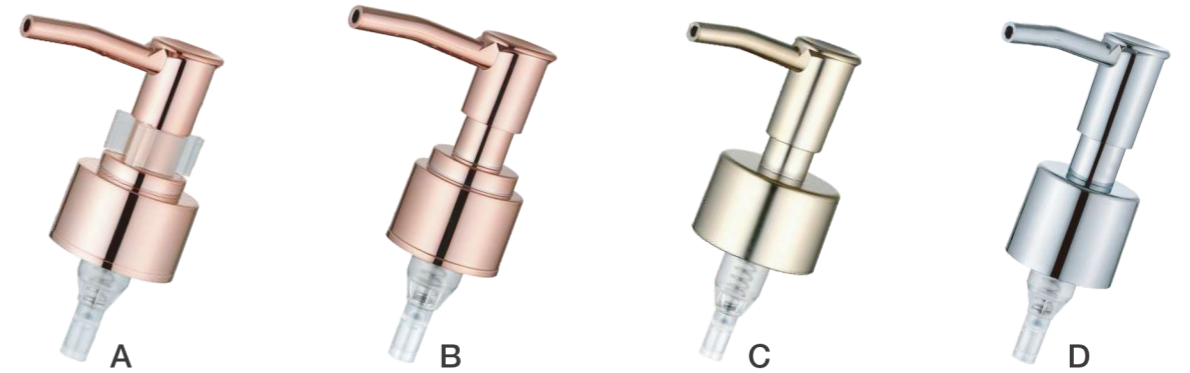

SM25E02 Stainless Steel

Finish: Brushed SS, Brushed Nickel, Antique Brass, Oil Rubbed Bronze



SM27 Cleansing Pumps 卸妆泵

■ Superior Safety & Reliability

- Customized super oil-resistant imported materials, ensuring unmatched durability against corrosive solvents.

■ Zero Leakage, Zero Mess

- Advanced -0.08MPa negative pressure seal prevents leakage under any condition.
- Automatic liquid-collecting design contains overflow, keeping bottles clean and stain-free.

NBR Piston (丁腈橡胶活塞)

EXCELLENT OIL & CHEMICAL RESISTANCE

Discharge Rate:
0.90-1.10 ml/T

Closure:
24/410



NBR Piston



PE Piston



SM27



SM27 Nail Polish Remover Pump Dispensers 卸甲油泵

■ Superior Safety & Reliability

- Customized super oil-resistant imported materials, ensuring unmatched durability against corrosive solvents.

■ Unmatched Performance

- Expertly engineered to pump high-viscosity liquids with ease, ensuring complete evacuation.
- Delivers a precise, consistent amount with every press to minimize waste.



NBR Piston PE Piston



Ø24/410, Ø33/410
SM27I
Discharge rate: 0.50-0.55ml/T



Ø24/410, Ø33/410
SM27J
Discharge rate: 0.50-0.55ml/T



Ø24mm, Ø28mm
SM27K
Discharge rate: 0.50-0.55ml/T



Ø33mm
SM27M
Discharge rate: 0.50-0.55ml/T

SM27



Ø33mm
SM27N
Discharge rate: 0.50-0.55ml/T



Ø24mm
SM27O
Discharge rate: 0.50-0.55ml/T

Nail Remover Sets



Ø24/410, Ø33/410
SM27J-A



Ø33/410
SM27J-C

SM3139

All Plastic Foam Pumps - Plastic Spring
全塑泡沫泵 - 塑料弹簧

ALL PLASTIC ENVIRONMENTAL PROTECTION

- **Environmentally Sustainable:** 100% recyclable with an innovative plastic spring design, allowing it to be directly disposed of in recycling bins.
- **Strong Corrosion Resistance:** The all-plastic structure offers superior resistance to various chemical components.
- **Versatile Applications:** Suitable for a wide range of products, including foam facial cleansers, foam hand soap, children's products, and products designed for sensitive skin.



SM3139

Discharge Rate:
1.0±0.2 ml/T

Closure:
43/410



Ø43mm

SM3140

Discharge Rate: 0.8CC



SM31

All Plastic Foam Pumps - Plastic Spring
全塑泡沫泵 - 塑料弹簧



Ø40mm

SM3141

Discharge Rate: 0.8CC



SM31

Foam Pumps



Ø28/410
SM3130
Discharge rate:
0.25±0.05ml/T



Ø28/410
SM3111
Discharge rate:
0.25±0.05ml/T



Ø28/410
SM3112
Discharge rate:
0.25±0.05ml/T



Ø28/410
SM3113
Discharge rate:
0.25±0.05ml/T

SM31



Ø43mm
SM3122
Discharge rate:
0.80±0.12ml/T



Ø43mm
SM3124
Discharge rate:
0.80±0.12ml/T



Ø40mm
SM3107
Discharge rate:
1.50±0.22ml/T



Ø40mm
SM3123
Discharge rate:
1.50±0.22ml/T



Ø30mm
SM3104
Discharge rate:
0.40±0.06ml/T



Ø30mm
SM3105
Discharge rate:
0.40±0.06ml/T



Ø40mm
SM3108-A
Discharge rate:
0.80±0.12ml/T



Ø40mm
SM3108-B
Discharge rate:
0.80±0.12ml/T



Ø43/410
SM3127
Discharge rate:
0.80±0.12ml/T
1.50±0.22ml/T



Ø40/410
SM3128
Discharge rate:
0.80±0.12ml/T
1.50±0.22ml/T



Ø43/400, Ø43/410
SM3129
Discharge rate:
0.80±0.12ml/T
1.50±0.22ml/T



Ø40/410
Ø43/400, Ø43/410
SM3131
Discharge rate:
0.80±0.12ml/T
1.50±0.22ml/T



Ø40mm
SM3116
Discharge rate:
0.80±0.12ml/T



Ø40mm
SM3117
Discharge rate:
0.80±0.12ml/T



Ø43mm
SM3109
Discharge rate:
0.80±0.12ml/T



Ø43mm
SM3110-A
Discharge rate:
0.80±0.12ml/T



Ø40/410
SM3132
Discharge rate:
0.80±0.12ml/T
1.50±0.22ml/T



Ø43/400, Ø43/410
SM3133
Discharge rate:
0.80±0.12ml/T
1.50±0.22ml/T



Ø43/400
SM3134
Discharge rate:
0.80±0.12ml/T
1.50±0.22ml/T



Ø40/410
Ø43/400, Ø43/410
SM3135
Discharge rate:
0.80±0.12ml/T
1.50±0.22ml/T

Outside Spring

SM32

Foaming Dispenser Bottles



SM3201
Closure: Ø28mm
Capacity: 40ml, 60ml, 80ml



SM3202
Closure: Ø30/410
Capacity: 30ml, 50ml, 80ml, 100ml



SM3206
Closure: Ø43/410
Capacity: 250ml, 450ml



SM3209
Closure: Ø43/410
Capacity: 130ml, 150ml, 200ml, 220ml



SM3203
Closure: Ø40/410
Capacity: 250ml



SM3204
Closure: Ø43mm
Capacity: 100ml, 120ml, 150ml, 200ml, 300ml



SM3211
Closure: Ø40/410
Capacity: 250ml



SM3212
Closure: Ø20/410
Capacity: 30ml, 50ml

SM32

Foaming Dispenser Bottles



SM3213
Closure:Ø43mm
Capacity:185ml



SM3214
Closure:Ø43mm
Capacity:300ml



SM3217
Closure:Ø40mm
Capacity:250ml



SM3218
Closure:Ø43mm
Capacity:300ml



SM3215
Closure:Ø43mm
Capacity:300ml



SM3216
Closure:Ø43mm
Capacity:300ml



SM3219
Closure:Ø43mm
Capacity:300ml



SM3220
Closure:Ø40mm
Capacity:500ml

SM47

Fine Mist Sprayers
小喷雾

HV Mist Sprayer

- **Advanced Micro-Mist Tech:**
Tiny droplets, even coverage, powerful reach.
- **Versatile Uses:**
From cozy homes to professional spaces—freshening, humidifying, and disinfecting.

ABS Shell UV Coating Closure



SM4701

Discharge Rate:
0.19 CC

Closure:
24/410



SM41

All Plastic Fine Mist Sprayers

All Plastic

Fully Recyclable



SM41001

Discharge Rate: 0.14-0.16 ml/T
Ø18/410 Ø20/410
Smooth / Ribbed



SM41002

Discharge Rate: 0.14-0.16 ml/T
Ø24/410 Ø28/410
Smooth / Ribbed



SM41004

Discharge Rate: 0.14-0.16 ml/T
Ø30
Smooth / Ribbed



SM41009

Treatment Pump
Discharge Rate: 0.14-0.16 ml/T
Ø20/410 Ø24/410
Smooth / Ribbed



SM41005

Discharge Rate: 0.14-0.16 ml/T
Ø18/410 Ø20/410
Ø24/410 Ø28/410
Smooth / Ribbed



SM41006

Discharge Rate: 0.14-0.16 ml/T
Ø18/410 Ø20/410
Ø24/410
Smooth / Ribbed



SM41007

Discharge Rate: 0.14-0.16 ml/T
Ø18/410 Ø20/410
Ø24/410
Smooth / Ribbed



SM41008

Discharge Rate: 0.14-0.16 ml/T
Ø18/410 Ø20/410
Ø24/410 Ø28/410
Smooth / Ribbed

SM46

Fine Mist Sprayers



SM4601
Closure: Ø18/410



SM4603
Closure: Ø20/410



SM4604
Closure: Ø20/410



SM4605
Closure: Ø22/415



SM4606
Closure: Ø22/415



SM4607
Closure: Ø24/410



SM4608
Closure: Ø24/410



SM4609
Closure: Ø24/415



SM4610
Closure: Ø24/415



SM4611
Closure: Ø28/410

Oil & Gel Spray for Viscous products 喷油小喷雾系列

Discharge Rate:
0.17-0.22ml/T

VARIOUS ALUMINUM SHELL OPTIONS

- Available in a wide range of closures.
- Excellent spray pattern.
- High variety of inserts.
- Compatible with difficult formulations.
- It was specially created for aggressive formulas and high-viscosity products.



360 Degree UD Spray



SM42

- Smooth and ribbed closures in all standard sizes as well as with aluminum shells over the closure
- Various Aluminum shell options

Discharge Rate:
0.15-0.18ml/T
Smooth / Ribbed / Aluminum



Round Top



Flat Top



K Resin



Full Cap



Ø18/410
SM4202



Ø18/415
SM4203A



Ø18/415
SM4203B



Ø20/410
SM4204



Ø20/410
SM4205



Ø22/415
SM4206



Ø24/410
SM4207



Ø24/410
SM4208



Ø24/415
SM4209



Ø24/415
SM4210



Ø28/410
SM4211



Ø28/410
SM4212



Ø13/410
SM4213



Ø15/410
SM4214



Ø15/410
SM4215

SM43

- Design for low and medium viscosity products
- Usage: Sun care products / Spray Gel / Glitter Spray
- Various Aluminum shell options



Discharge Rate:
0.20-0.30ml/T
Smooth / Ribbed / Aluminum



Ø20/410 **SM4303** Ø20/410 **SM4304** Ø22/415 **SM4307** Ø22/415 **SM4314** Ø24/410 **SM4308** Ø24/410 **SM4309**



Ø24/415 **SM4310** Ø24/415 **SM4311** Ø28/400 **SM4312** Ø28/400 **SM4315** Ø28/410 **SM4313** Ø28/410 **SM4316**

EXTENDED SPRAY



Ø20/410, Ø24/410, Ø28/410
SM4503
 Discharge rate: 0.20-0.30ml/T

VERTICAL SPRAY



Ø18/410, Ø18/415
SM4505
 Discharge rate: 0.12ml/T



Ø18/410, Ø20/410, Ø24/410
SM4514



Ø30/410
SM4516
 Discharge rate: 0.15ml/T

SM41



Ø13/400 Ø15/400 Ø18/400 Ø20/400
SM4101
 Discharge rate: 0.05-0.07ml/T



Ø13/410 Ø15/410 Ø18/410 Ø20/410 Ø24/410
SM4102
 Discharge rate: 0.05-0.07ml/T



Ø13/400 Ø15/400 Ø18/400 Ø20/400
SM4103
 Discharge rate: 0.05-0.07ml/T



Ø15/400 Ø20/400
SM4104
 Discharge rate: 0.10-0.14ml/T



Ø18/410, Ø20/410, Ø24/410
SM4105
 Discharge rate: 0.10-0.14ml/T



Ø15/400 Ø20/400
SM4106
 Discharge rate: 0.10-0.14ml/T

SM52 Credit Card Sprayers 卡片瓶

- **Slim, flat design:** Ultra-portable, slips easily into pockets or wallets. Ideal for travel or on-the-go use.
- **Versatile Applications:** Suitable for a wide range of products, including disinfectant sprays, mouthwashes, hydrating essences, and more.



10ml
SM5201-10



15ml
SM5201-15
PATENT NO. ZL 2012 3 0429144.0

REFILL



15ml
SM5201-15B

SM52



20ml
SM5205



20ml
SM5206



10ml/15ml
SM5208



10ml/15ml
SM5209



20ml
SM5201-20A



20ml
SM5201-20C



20ml
SM5201-20E



20ml
SM5201-20F



25ml
SM5201-25B



25ml
SM5201-25C



28ml
SM5201-28A



20ml
SM5204

SM5202 Snap on Spray 圆筒喷雾瓶

SNAP ON SPRAY WITH LOCKING ACTUATOR

Capacity: 30ml



SM51 Mini Sprayers 迷你喷雾器



SM5101



SM5102



SM5103



SM5104



SM5105



SM5106



SM5108



SM5109



SM5214

SM53 Sustainable sprayer 可持续喷雾器

CONFIDENT DISPENSING WITH PRE-COMPRESSION

- **Ultimate Ease of Use:** One Press, Continuous Spray. No repeated pressing required unlike traditional pump sprays.
- **Effortless Large-Surface Spraying:** Covers large areas quickly and easily without missing a spot.

SM53-1

BOTTLE OPTIONS



SM53-2

UNIQUE ROUND-HEAD DESIGN

Capacity: 200ml 250ml 360ml 500ml



Capacity: 250ml

SM66

UPG Pumps / UPG Sprayers
UPG 乳液泵 / UPG 喷雾器

SMOOTH / UV COATING

- **Spray Technology:** Utilizes nanotechnology to generate a consistent, fine mist for even coverage.
- **Dust Cover:** Prevents nozzle clogging from dust and debris, ensuring hygiene and longevity.



A



B



SM61

Treatment Pumps



Outside Spring



SM61-SM64

Treatment Pumps



Ø18/410
SM6113



Ø20/410
SM6117



Ø20/410
SM6119



Ø18/410
SM6122



Ø18/410
SM6124



Ø18/410
SM6125



Ø18/410, Ø18/415
Ø20/410, Ø20/415
SM6202



Ø18/410
SM6205



Ø18/410
Ø20/410, Ø24/410
SM6207



Ø20/410, PP
SM6401



Ø24/410, PP
SM6403



Ø24/410, UV coating
SM6406

SM64



Ø24/410, Aluminum
SM6409



Ø24/410, Outside Spring
SM6410



Ø24/410
SM6411



Ø18/410
SM6415



Ø20/410
SM6416



Ø24/410
SM6417



Ø20/410
SM6418

SM65



Ø18/415, PP
SM6501



Ø18/415, Aluminum
SM6502



Ø20/410, PP
SM6504



Ø24/410, Aluminum
SM6505

SM7

Plastic Caps— ABS Shell UV Coating / Water Transfer
塑料盖 (ABS电镀外圈/水转印工艺)

CUSTOM DESIGN ACCEPTABLE

■ Why Choose ABS Caps Over Aluminum Shelled Caps?

- Eco-friendly
- Shorter Delivery Time
- Scratch-Resistant
- Lower Cost

■ Advantages of Hydrographic Transfer Printing

- Wood Grain Effect
- Diverse Pattern Options



ABS Shell UV Coating Caps

SM71

 Ø20/410 SM7123	 Ø20/415 SM7124	 Ø24/410 SM7125	 Ø24/415 SM7126
 Ø28/410 SM7127	 Ø28/415 SM7128	 Ø24/410 SM7129	 Ø24/410 SM7130
 Ø20/410 SM7131	 Ø58/400 SM7319	 Ø70/400 SM7320	 Ø89/400 SM7321

Water Transfer Caps

SM73

 Ø20 SM7313	 Ø25 SM7314	 Ø37.5 SM7315
 Ø50 SM7316	 Ø60 SM7317	 Ø52 SM7318

Disc Top Caps

SM71



Screw Caps

SM73



Flip Top Caps

SM72



Flip Top Caps

SM72



Ø24/410

SM7222



Ø24/410, Ø24/410

SM7223



Ø28/410

SM7227



Ø24/410, Ø28/400, Ø28/410

SM7224



Ø24/410, Ø28/410

SM7231



Ø24/415, Ø28/415

SM7232



Ø24/415

SM7241



Ø20/410

SM7238



Ø28/410

SM7237



Ø24/415

SM7236



Ø32/400

SM7247



Ø20/415

SM7248



Ø28/410

SM7249



Ø38/400

SM7253



Ø24/415

SM7254



Ø20/410, Ø24/410, Ø28/410

SM7255

Push Pull & Twist Caps

SM74



Ø24/410

SM7401



Ø28/410

SM7402



Ø28/410

SM7403



Ø28/410

SM7404



Ø28/410

SM7405



Ø28/410

SM7406



Ø20/410, Ø24/410, Ø28/410

SM7407



Ø20/410, Ø24/410

SM7408



Ø28/410

SM7411



Ø24/410, Ø28/410

SM7412



Ø24/410, Ø28/410

SM7413



Ø24/410, Ø28/410

SM7414

Other Caps

SM75



Ø20/410, Ø24/410, Ø28/410

SM7501A



Ø24/415

SM7501B



Ø24/410

SM7505



Ø18/410, Ø20/410, Ø24/410, Ø28/410, Ø32/410, Ø38/410, Ø48/410

SM7506